184 pin Unbuffered DDR DIMM

Based on DDR400/333/266 256M bit B Die device

Features

• 184 Dual In-Line Memory Module (DIMM)
• Unbuffered DDR DIMM based on 256M bit die B device, organized as either 32Mbx8 or 16Mbx16
• Performance:

	PC3200	PC2700	PC2100	Unit
Speed Sort	5T	6K	75B	
DIMM $\overline{CAS}$ Latency	3	2.5	2.5	
f_{CK} Clock Frequency	200	166	133	MHz
t_{CK} Clock Cycle	5	6	7.5	ns
f_{DQ} DQ Burst Frequency	400	333	266	MHz

• Intended for 133, 166 and 200 MHz applications
• Inputs and outputs are SSTL-2 compatible
• V_{DD} = V_{DDQ} = 2.5V ± 0.2V (2.6V ± 0.1V for PC3200)
• SDRAMs have 4 internal banks for concurrent operation
• Differential clock inputs
• Data is read or written on both clock edges
• DRAM DLL aligns DQ and DQS transitions with clock transitions
• Address and control signals are fully synchronous to positive clock edge
• Programmable Operation:
  - DIMM $\overline{CAS}$ Latency: 2, 2.5, 3
  - Burst Type: Sequential or Interleave
  - Burst Length: 2, 4, 8
  - Operation: Burst Read and Write
• Auto Refresh (CBR) and Self Refresh Modes
• Automatic and controlled precharge commands
• 7.8 μs Max. Average Periodic Refresh Interval
• Serial Presence Detect EEPROM
• Gold contacts
• SDRAMs are packaged in TSOP packages

Description

M2U51264DS8HB3G, M2U25664DS88B3G, and M2U12864DSH4B3G are unbuffered 184-Pin Double Data Rate (DDR) Synchronous DRAM Dual In-Line Memory Modules (DIMM). M2U51264DS8HB3G is 512MB modules organized as dual ranks using sixteen 32Mx8 TSOP devices. M2U25664DS88B3G is 256MB modules organized as single rank using eight 32Mx8 TSOP devices. M2U12864DSH4B3G is 128MB modules, organized as single rank using four 16Mx16 TSOP devices.

Depending on the speed grade, these DIMMs are intended for use in applications operating up to 200 MHz clock speeds and achieves high-speed data transfer rates of up to 400 MHz. Prior to any access operation, the device $\overline{CAS}$ latency and burst type/ length/operation type must be programmed into the DIMM by address inputs and I/O inputs BA0 and BA1 using the mode register set cycle.
The DIMM uses a serial EEPROM and through the use of a standard IIC protocol the serial presence-detect implementation (SPD) can be accessed. The first 128 bytes of the SPD data are programmed with the module characteristics as defined by JEDEC.

© NANYA TECHNOLOGY CORPORATION
NANYA reserves the right to change products and specifications without notice.

Ordering Information

Part Number	Organization	Speed			Power	Leads
M2U51264DS8HB3G-5T	64Mx64	DDR400	PC3200 3-3-3	200MHz (5ns @ CL = 3) 166MHz (6ns @ CL = 2.5)	2.6V	Gold
M2U25664DS88B3G-5T	32Mx64					
M2U12864DSH4B3G-5T	16Mx64					
M2U51264DS8HB3G-6K	64Mx64	DDR333	PC2700 2.5-3-3	166MHz (6ns @ CL = 2.5) 133MHz (7.5ns @ CL = 2)	2.5V	
M2U25664DS88B3G-6K	32Mx64					
M2U12864DSH4B3G-6K	16Mx64					
M2U51264DS8HB3G-75B	64Mx64	DDR266B	PC2100 2.5-3-3	133MHz (7.5ns @ CL = 2.5) 100MHz (10ns @ CL = 2)		
M2U25664DS88B3G-75B	32Mx64					
M2U12864DSH4B3G-75B	16Mx64					

For the closest sales office or information, please visit: www.elixir-memory.com

Nanya Technology Corporation

Hwa Ya Technology Park 669

Fu Hsing 3rd Rd., Kueishan,

Taoyuan, 333, Taiwan, R.O.C.

Tel: +886-3-328-1688

© NANYA TECHNOLOGY CORPORATION
NANYA reserves the right to change products and specifications without notice.

Pin Description

CK0, CK1, CK2, $\overline{CK0}$, $\overline{CK1}$, $\overline{CK2}$	Differential Clock Inputs.	DQ0-DQ63	Data input/output
CKE0, CKE1	Clock Enable	DQS0-DQS7	Bidirectional data strobes
$\overline{RAS}$	Row Address Strobe	DM0-DM7	Input Data Mask
$\overline{CAS}$	Column Address Strobe	V_{DD}	Power
$\overline{WE}$	Write Enable	V_{DDQ}	Supply voltage for DQs
$\overline{S0}$, $\overline{S1}$	Chip Selects	V_{SS}	Ground
A0-A9, A11, A12	Address Inputs	NC	No Connect
A10/AP	Address Input/Auto-precharge	SCL	Serial Presence Detect Clock Input
BA0, BA1	SDRAM Bank Address Inputs	SDA	Serial Presence Detect Data input/output
V_{REF}	Ref. Voltage for SSTL_2 inputs	SA0-2	Serial Presence Detect Address Inputs
V_{DDID}	V_{DD} Identification flag.	V_{DDSPD}	Serial EEPROM positive power supply

Pinout

Pin	Front	Pin	Back	Pin	Front	Pin	Back	Pin	Front	Pin	Back
1	V_{REF}	93	V_{SS}	32	A5	124	V_{SS}	62	V_{DDQ}	154	$\overline{RAS}$
2	DQ0	94	DQ4	33	DQ24	125	A6	63	$\overline{WE}$	155	DQ45
3	V_{SS}	95	DQ5	34	V_{SS}	126	DQ28	64	DQ41	156	V_{DDQ}
4	DQ1	96	V_{DDQ}	35	DQ25	127	DQ29	65	$\overline{CAS}$	157	$\overline{S0}$
5	DQS0	97	DM0/DQS9	36	DQS3	128	V_{DDQ}	66	V_{SS}	158	$\overline{S1}$
6	DQ2	98	DQ6	37	A4	129	DM3/DQS12	67	DQS5	159	DM5/DQS14
7	V_{DD}	99	DQ7	38	V_{DD}	130	A3	68	DQ42	160	V_{SS}
8	DQ3	100	V_{SS}	39	DQ26	131	DQ30	69	DQ43	161	DQ46
9	NC	101	NC	40	DQ27	132	V_{SS}	70	V_{DD}	162	DQ47
10	NC	102	NC	41	A2	133	DQ31	71	NC	163	NC
11	V_{SS}	103	NC	42	V_{SS}	134	NC	72	DQ48	164	V_{DDQ}
12	DQ8	104	V_{DDQ}	43	A1	135	NC	73	DQ49	165	DQ52
13	DQ9	105	DQ12	44	NC	136	V_{DDQ}	74	V_{SS}	166	DQ53
14	DQS1	106	DQ13	45	NC	137	CK0	75	$\overline{CK2}$	167	NC
15	V_{DDQ}	107	DM1/DQS10	46	V_{DD}	138	$\overline{CK0}$	76	CK2	168	V_{DD}
16	CK1	108	V_{DD}	47	NC	139	V_{SS}	77	V_{DDQ}	169	DM6/DQS15
17	$\overline{CK1}$	109	DQ14	48	A0	140	NC	78	DQS6	170	DQ54
18	V_{SS}	110	DQ15	49	NC	141	A10	79	DQ50	171	DQ55
19	DQ10	111	CKE1	50	V_{SS}	142	NC	80	DQ51	172	V_{DDQ}
20	DQ11	112	V_{DDQ}	51	NC	143	V_{DDQ}	81	V_{SS}	173	NC
21	CKE0	113	NC	52	BA1	144	NC	82	V_{DDID}	174	DQ60
22	V_{DDQ}	114	DQ20	KEY		KEY		83	DQ56	175	DQ61
23	DQ16	115	A12	53	DQ32	145	V_{SS}	84	DQ57	176	V_{SS}
24	DQ17	116	V_{SS}	54	V_{DDQ}	146	DQ36	85	V_{DD}	177	DM7/DQS16
25	DQS2	117	DQ21	55	DQ33	147	DQ37	86	DQS7	178	DQ62
26	V_{SS}	118	A11	56	DQS4	148	V_{DD}	87	DQ58	179	DQ63
27	A9	119	DM2/DQS11	57	DQ34	149	DM4/DQS13	88	DQ59	180	V_{DDQ}
28	DQ18	120	V_{DD}	58	V_{SS}	150	DQ38	89	V_{SS}	181	SA0
29	A7	121	DQ22	59	BA0	151	DQ39	90	WP	182	SA1
30	V_{DDQ}	122	A8	60	DQ35	152	V_{SS}	91	SDA	183	SA2
31	DQ19	123	DQ23	61	DQ40	153	DQ44	92	SCL	184	V_{DDSPD}

Note: All pin assignments are consistent for all 8-byte unbuffered versions.

© NANYA TECHNOLOGY CORPORATION
NANYA reserves the right to change products and specifications without notice.

Input/Output Functional Description

Symbol	Type	Polarity	Function
CK0, CK1, CK2, $\overline{CK0}$, $\overline{CK1}$, $\overline{CK2}$	(SSTL)	Cross point	The system clock inputs. All address and command lines are sampled on the cross point of the rising edge of CK and falling edge of CK. A Delay Locked Loop (DLL) circuit is driven from the clock inputs and output timing for read operations is synchronized to the input clock.
CKE0, CKE1	(SSTL)	Active High	Activates the DDR SDRAM CK signal when high and deactivates the CK signal when low. By deactivating the clocks, CKE low initiates the Power Down mode or the Self Refresh mode.
$\overline{S0}$, $\overline{S1}$	(SSTL)	Active Low	Enables the associated DDR SDRAM command decoder when low and disables the command decoder when high. When the command decoder is disabled, new commands are ignored but previous operations continue. Physical Bank 0 is selected by S0; Bank 1 is selected by S1.
$\overline{RAS}$, $\overline{CAS}$, $\overline{WE}$	(SSTL)	Active Low	When sampled at the positive rising edge of the clock, $\overline{RAS}$, $\overline{CAS}$, $\overline{WE}$ define the operation to be executed by the SDRAM.
V_{REF}	Supply		Reference voltage for SSTL-2 inputs
V_{DDQ}	Supply		Isolated power supply for the DDR SDRAM output buffers to provide improved noise immunity
BA0, BA1	(SSTL)	-	Selects which SDRAM bank is to be active.
A0 - A9 A10/AP A11, A12	(SSTL)	-	During a Bank Activate command cycle, A0-A12 defines the row address (RA0-RA12) when sampled at the rising clock edge. During a Read or Write command cycle, A0-A9 defines the column address (CA0-CA9) when sampled at the rising clock edge. In addition to the column address, AP is used to invoke auto-precharge operation at the end of the Burst Read or Write cycle. If AP is high, auto-precharge is selected and BA0/BA1 defines the bank to be precharged. If AP is low, auto-precharge is disabled. During a Precharge command cycle, AP is used in conjunction with BA0/BA1 to control which bank(s) to precharge. If AP is high all 4 banks will be precharged regardless of the state of BA0/BA1. If AP is low, then BA0/BA1 are used to define which bank to pre-charge.
DQ0 - DQ63	(SSTL)	-	Data and Check Bit input/output pins operate in the same manner as on conventional DRAMs.
DQS0 - DQS7, DQS9 – DQS16	(SSTL)	Active High	Data strobes: Output with read data, input with write data. Edge aligned with read data, centered on write data. Used to capture write data.
CB0 – CB7	(SSTL)	-	Data Check Bit Input/Output pins. Used on ECC modules and is not used on x64 modules.
DM0 – DM8	Input	Active High	The data write masks, associated with one data byte. In Write mode, DM operates as a byte mask by allowing input data to be written if it is low but blocks the write operation if it is high. In Read mode, DM lines have no effect. DM8 is associated with check bits CB0-CB7, and is not used on x64 modules.
V_{DD}, V_{SS}	Supply		Power and ground for the DDR SDRAM input buffers and core logic
SA0 – SA2		-	Address inputs. Connected to either V_{DD} or V_{SS} on the system board to configure the Serial Presence Detect EEPROM address.
SDA		-	This bi-directional pin is used to transfer data into or out of the SPD EEPROM. A resistor must be connected from the SDA bus line to V DD to act as a pull-up.
SCL		-	This signal is used to clock data into and out of the SPD EEPROM. A resistor may be connected from the SCL bus time to V DD to act as a pull-up.
V_{DDSPD}	Supply		Serial EEPROM positive power supply.

© NANYA TECHNOLOGY CORPORATION
NANYA reserves the right to change products and specifications without notice.

Functional Block Diagram

2 Ranks, 16 devices, 32Mx8 DDR SDRAMs

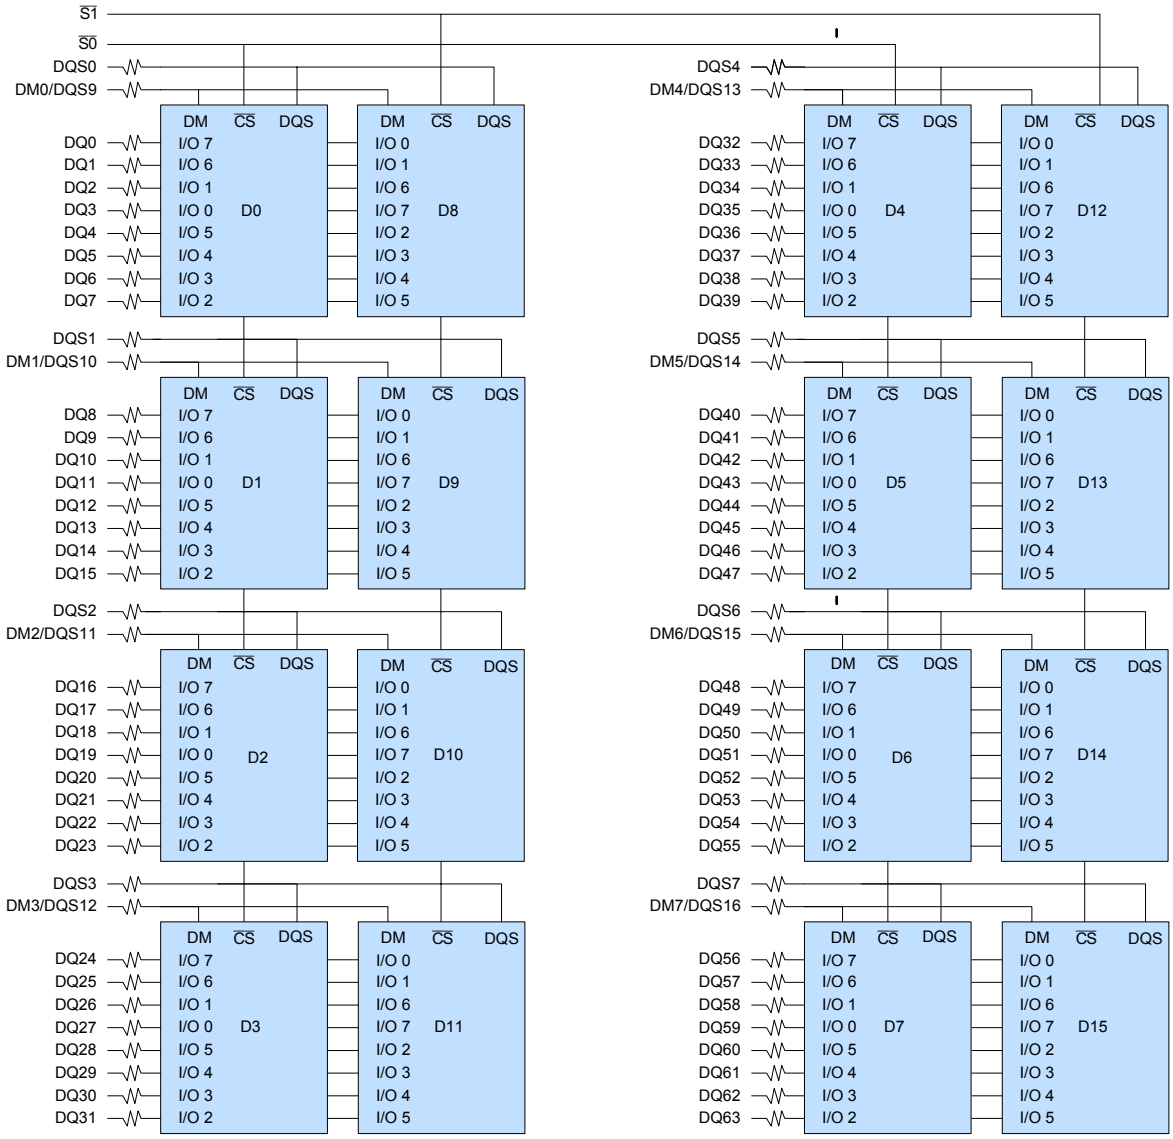

Notes :

1. DQ-to-I/O wiring is shown as recommended but may be changed.
2. DQ/DQS/DM/CKE/S relationships must be maintained as shown.
3. DQ, DQS, DM/DQS resistors: 22 Ohms.
4. V_{DDID} strap connections (for memory device V_{DD}, V_{DDQ}):
   STRAP OUT (OPEN): $V_{DD} = V_{DDQ}$
   STRAP IN (V_{SS}): V_{DD} is not equal to V_{DDQ}.

© NANYA TECHNOLOGY CORPORATION
NANYA reserves the right to change products and specifications without notice.

Functional Block Diagram

1 Rank, 8 devices, 32Mx8 DDR SDRAMs

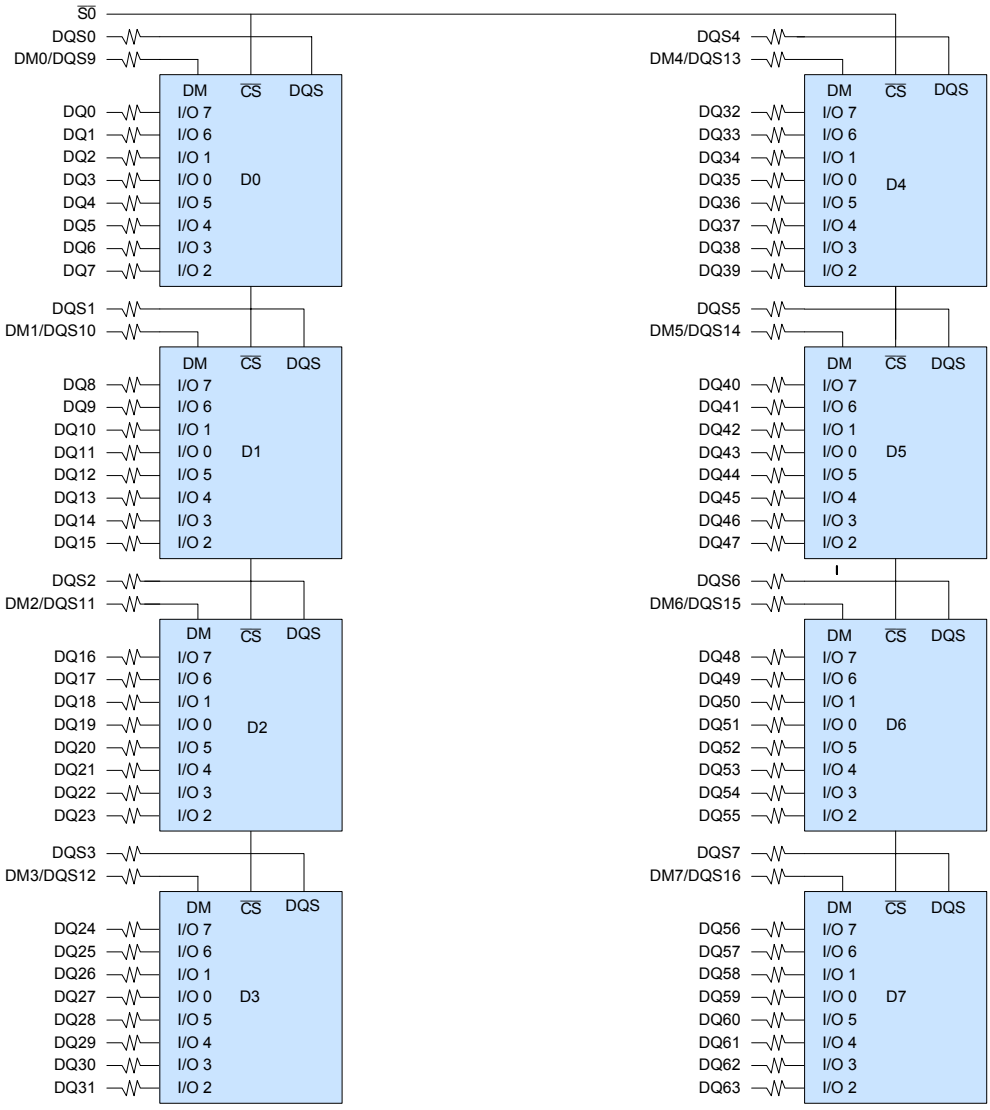

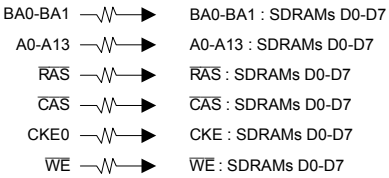

* Clock Wiring	
Clock Input	SDRAMs
*CK0/CK0	2 SDRAMs
*CK1/CK1	3 SDRAMs
*CK2/CK2	3 SDRAMs

* Wire per Clock Loading Table/ Wiring Diagrams



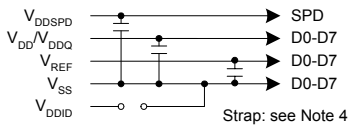

Notes :

1. DQ-to-I/O wiring is shown as recommended but may be changed.
2. DQ/DQS/DM/CKE/S relationships must be maintained as shown.
3. DQ, DQS, DM/DQS resistors: 22 Ohms.
4. V_{DDID} strap connections (for memory device V_{DD}, V_{DDQ}):
   STRAP OUT (OPEN): $V_{DD} = V_{DDQ}$
   STRAP IN (V_{SS}): V_{DD} is not equal to V_{DDQ}.

© NANYA TECHNOLOGY CORPORATION
NANYA reserves the right to change products and specifications without notice.

Functional Block Diagram

1 Rank, 4 devices, 16Mx16 DDR SDRAMs

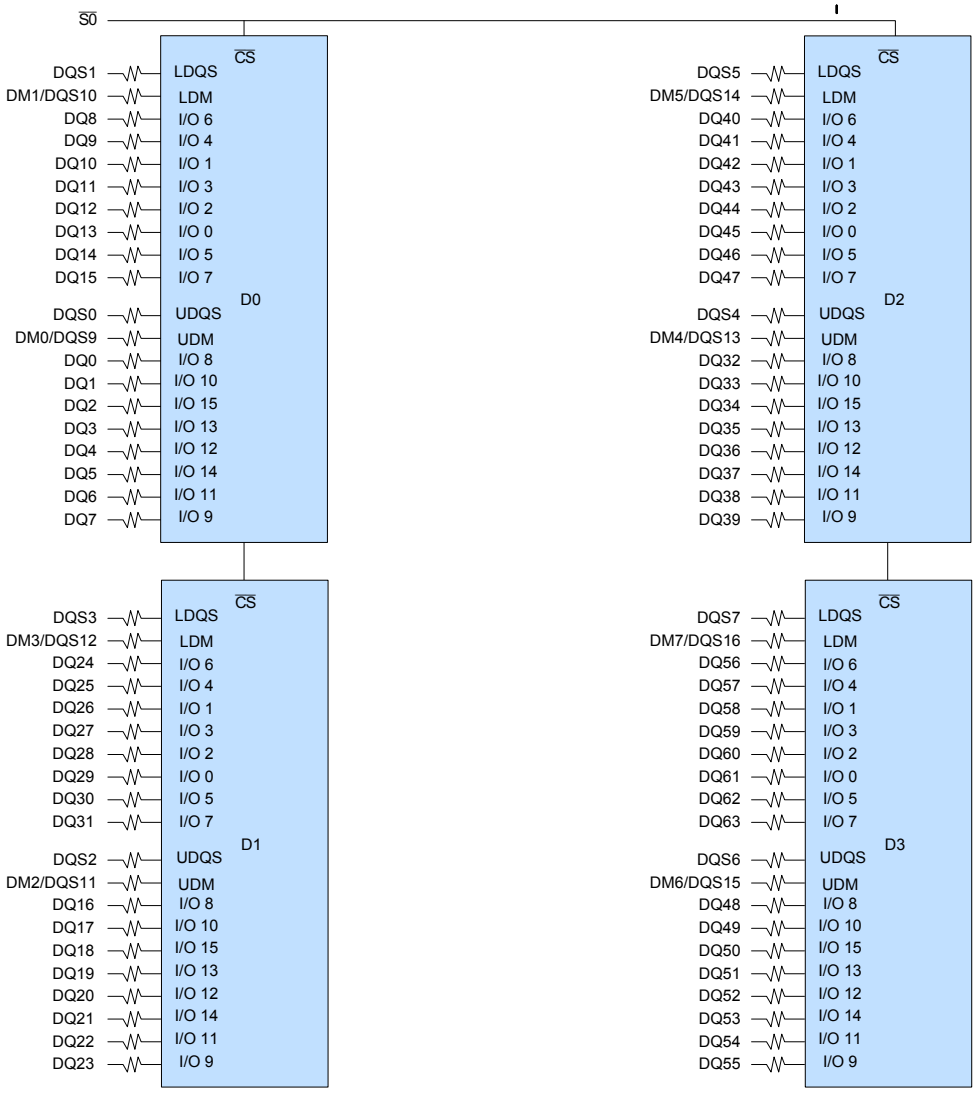

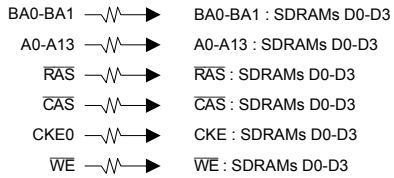

* Clock Wiring	
Clock Input	SDRAMs
*CK0/CK0	NC
*CK1/CK1	2 SDRAMs
*CK2/CK2	2 SDRAMs

* Wire per Clock Loading Table/ Wiring Diagrams



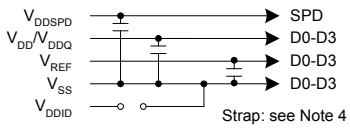

Notes :

1. DQ-to-I/O wiring is shown as recommended but may be changed.
2. DQ/DQS/DM/CKE/S relationships must be maintained as shown.
3. DQ, DQS, DM/DQS resistors: 22 Ohms.
4. V_{DDID} strap connections (for memory device V_{DD}, V_{DDQ}):
   STRAP OUT (OPEN): $V_{DD} = V_{DDQ}$
   STRAP IN (V_{SS}): V_{DD} is not equal to V_{DDQ}.

© NANYA TECHNOLOGY CORPORATION
NANYA reserves the right to change products and specifications without notice.

Serial Presence Detect

SPD Description

Byte	Description	Byte	Description
0	Number of Serial PD Bytes Written during Production	26	Maximum Data Access Time from Clock at CL=1
1	Total Number of Bytes in Serial PD device	27	Minimum Row Precharge Time (t_{RP})
2	Fundamental Memory Type	28	Minimum Row Active to Row Active delay (t_{RRD})
3	Number of Row Addresses on Assembly	29	Minimum RAS to CAS delay (t_{RCD})
4	Number of Column Addresses on Assembly	30	Minimum RAS Pulse Width (t_{RAS})
5	Number of DIMM Rank	31	Module Bank Density
6	Data Width of Assembly	32	Address and Command Setup Time Before Clock
7	Data Width of Assembly (cont')	33	Address and Command Hold Time After Clock
8	Voltage Interface Level of this Assembly	34	Data Input Setup Time Before Clock
9	DDR SDRAM Device Cycle Time CL=2.5	35	Data Input Hold Time After Clock
10	DDR SDRAM Device Access Time from Clock CL=2.5	36-40	Reserved
11	DIMM Configuration Type	41	Minimum Active/Auto-refresh Time (t_{RC})
12	Refresh Rate/Type	42	Auto-refresh to Active/Auto-refresh Command Period (t_{RFC})
13	Primary DDR SDRAM Width	43	Max Cycle Time ($t_{CK\ max}$)
14	Error Checking DDR SDRAM Device Width	44	Maximum DQS-DQ Skew Time (t_{DQSQ})
15	DDR SDRAM Device Attr: Min CLK Delay, Random Col Access	45	Maximum Read Data Hold Skew Factor (t_{QHS})
16	DDR SDRAM Device Attributes: Burst Length Supported	46-61	Reserved
17	DDR SDRAM Device Attributes: Number of Device Banks	62	SPD Revision
18	DDR SDRAM Device Attributes: CAS Latencies Supported	63	Checksum Data
19	DDR SDRAM Device Attributes: CS Latency	64-71	Manufacturer's JEDEC ID Code
20	DDR SDRAM Device Attributes: WE Latency	72	Module Manufacturing Location
21	DDR SDRAM Device Attributes:	73-90	Module Part number
22	DDR SDRAM Device Attributes: General	91-92	Module Revision Code
23	Minimum Clock Cycle CL=2.5	93-94	Module Manufacturing Data yy= Binary coded decimal year code, 0-99(Decimal), 00-63(Hex) ww= Binary coded decimal year code, 01-52(Decimal), 01-34(Hex)
24	Maximum Data Access Time from Clock at CL=2	95-98	Module Serial Number
25	Minimum Clock Cycle Time at CL=1	99-127	Reserved

© NANYA TECHNOLOGY CORPORATION
NANYA reserves the right to change products and specifications without notice.

SPD Values for M2U51264DS8HB3G

Byte	Description	DDR400 -5T		DDR333 -6K		DDR266 -75B	
		SPD Value	hexadecimal	SPD Value	hexadecimal	SPD Value	hexadecimal
0	Number of Serial PD Bytes Written during Production	128	80	128	80	128	80
1	Total Number of Bytes in Serial PD device	256	08	256	08	256	08
2	Fundamental Memory Type	DDR SDRAM	07	DDR SDRAM	07	DDR SDRAM	07
3	Number of Row Addresses on Assembly	13	0D	13	0D	13	0D
4	Number of Column Addresses on Assembly	10	0A	10	0A	10	0A
5	Number of DIMM Bank	2	02	2	02	2	02
6.	Data Width of Assembly	X64	40	X64	40	X64	40
7	Data Width of Assembly (cont')	X64	00	X64	00	X64	00
8	Voltage Interface Level of this Assembly	SSTL 2.5V	04	SSTL 2.5V	04	SSTL 2.5V	04
9	DDR SDRAM Device Cycle Time at CL=3	5ns	50	6ns	60	7.5ns	75
10	DDR SDRAM Device Access Time from Clock at CL=3	0.6ns	60	0.7ns	70	0.75ns	75
11	DIMM Configuration Type	Non-Parity	00	Non-Parity	00	Non-Parity	00
12	Refresh Rate/Type	SR/1x(7.8us), Self Refresh Flag	82	SR/1x(7.8us), Self Refresh Flag	82	SR/1x(7.8us), Self Refresh Flag	82
13	Primary DDR SDRAM Width	X8	08	X8	08	X8	08
14	Error Checking DDR SDRAM Device Width	N/A	00	N/A	00	N/A	00
15	DDR SDRAM Device Attr: Min Clk Delay, Random Col Access	1 Clock	01	1 Clock	01	1 Clock	01
16	DDR SDRAM Device Attributes: Burst Length Supported	2,4,8	0E	2,4,8	0E	2,4,8	0E
17	DDR SDRAM Device Attributes: Number of Device Banks	4	04	4	04	4	04
18	DDR SDRAM Device Attributes: CAS Latencies Supported	2/2.5/3	1C	2/2.5	0C	2/2.5	0C
19	DDR SDRAM Device Attributes: CS Latency	0	01	0	01	0	01
20	DDR SDRAM Device Attributes: WE Latency	1	02	1	02	1	02
21	DDR SDRAM Device Attributes:	Differential Clock	20	Differential Clock	20	Differential Clock	20
22	DDR SDRAM Device Attributes: General	+/-0.2V Voltage Tolerance	00	+/-0.2V Voltage Tolerance	00	+/-0.2V Voltage Tolerance	00
23	Minimum Clock Cycle at CL=2.5	6.0ns	60	7.5ns	75	10ns	A0
24	Maximum Data Access Time (t_{AC}) from Clock at CL=2.5	0.7ns	70	0.70ns	70	0.75ns	75
25	Minimum Clock Cycle Time at CL=2	7.5ns	75	N/A	00	N/A	00
26	Maximum Data Access Time (t_{AC}) from Clock at CL=2	7.5ns	75	N/A	00	N/A	00
27	Minimum Row Precharge Time (t_{RP})	15ns	3C	18ns	48	20ns	50
28	Minimum Row Active to Row Active delay (t_{RRD})	10ns	28	12ns	30	15ns	3C
29	Minimum RAS to CAS delay (t_{RCD})	15ns	3C	18ns	48	20ns	50
30	Minimum RAS Pulse Width (t_{RAS})	40ns	28	42ns	2A	45ns	2D
31	Module Bank Density	256MB	40	256MB	40	256MB	40
32	Address and Command Setup Time Before Clock	0.6ns	60	0.75ns	75	0.9ns	90
33	Address and Command Hold Time After Clock	0.6ns	60	0.75ns	75	0.9ns	90
34	Data Input Setup Time Before Clock	0.4ns	40	0.45ns	45	0.5ns	50
35	Data Input Hold Time After Clock	0.4ns	40	0.45ns	45	0.5ns	50
36-40	Reserved	Undefined	00	Undefined	00	Undefined	00
41	Minimum Active/Auto-Refresh Time (tRC)	55ns	37	60ns	3C	65ns	41
42	SDRAM Device Minimum Auto-Refresh to Active/Auto Refresh Command Period (tRFC)	70ns	46	72ns	48	75ns	4B
43	SDRAM Device Maximum Cycle Time (tCK max)	8	20	12	30	12	30
44	SDRAM Device Maximum DQS-DQ Skew Time (tDQSQ)	0.4	28	0.4	28	0.5	32
45	SDRAM Device Maximum Read Data Hold Skew Factor (tQHS)	0.5	50	0.55	55	0.75	75
46	Superset Information (may be used in future)	Undefined	00	Undefined	00	Undefined	00
47	SDRAM device Attributes – DDR SDRAM DIMM Height	31.75mm	01	31.75mm	01	31.75mm	01
48-61	Superset Information (may be used in future)	Undefined	00	Undefined	00	Undefined	00
62	SPD Revision	1.0	10	1.0	10	1.0	10
63	Checksum Data		A0		4D		34
64-71	Manufacturer's JEDED ID Code	0B Hex bank 3	7F7F7F0B000 00000	0B Hex bank 3	7F7F7F0B000 00000	0B Hex bank 3	7F7F7F0B000 00000
72	Module Manufacturing Location		Note1		Note1		Note1
73-255	Reserved	Undefined	Note 2	Undefined	Note 2	Undefined	Note 2

1. please refer to BNDCJ-0082
2. byte 73-255 please refer to NDCJ-0969

© NANYA TECHNOLOGY CORPORATION
NANYA reserves the right to change products and specifications without notice.

SPD Values for M2U25664DS88B3G

Byte	Description	DDR400 -5T		DDR333 -6K		DDR266 -75B	
		SPD Value	hexadecimal	SPD Value	hexadecimal	SPD Value	hexadecimal
0	Number of Serial PD Bytes Written during Production	128	80	128	80	128	80
1	Total Number of Bytes in Serial PD device	256	08	256	08	256	08
2	Fundamental Memory Type	DDR SDRAM	07	DDR SDRAM	07	DDR SDRAM	07
3	Number of Row Addresses on Assembly	13	0D	13	0D	13	0D
4	Number of Column Addresses on Assembly	10	0A	10	0A	10	0A
5	Number of DIMM Bank	1	01	1	01	1	01
6.	Data Width of Assembly	X64	40	X64	40	X64	40
7	Data Width of Assembly (cont')	X64	00	X64	00	X64	00
8	Voltage Interface Level of this Assembly	SSTL 2.5V	04	SSTL 2.5V	04	SSTL 2.5V	04
9	DDR SDRAM Device Cycle Time at CL=3	5ns	50	6ns	60	7.5ns	75
10	DDR SDRAM Device Access Time from Clock at CL=3	0.6ns	60	0.7ns	70	0.75ns	75
11	DIMM Configuration Type	Non-Parity	00	Non-Parity	00	Non-Parity	00
12	Refresh Rate/Type	SR/1x(7.8us), Self Refresh Flag	82	SR/1x(7.8us), Self Refresh Flag	82	SR/1x(7.8us), Self Refresh Flag	82
13	Primary DDR SDRAM Width	X8	08	X8	08	X8	08
14	Error Checking DDR SDRAM Device Width	N/A	00	N/A	00	N/A	00
15	DDR SDRAM Device Attr: Min Clk Delay, Random Col Access	1 Clock	01	1 Clock	01	1 Clock	01
16	DDR SDRAM Device Attributes: Burst Length Supported	2,4,8	0E	2,4,8	0E	2,4,8	0E
17	DDR SDRAM Device Attributes: Number of Device Banks	4	04	4	04	4	04
18	DDR SDRAM Device Attributes: CAS Latencies Supported	2/2.5/3	1C	2/2.5	0C	2/2.5	0C
19	DDR SDRAM Device Attributes: CS Latency	0	01	0	01	0	01
20	DDR SDRAM Device Attributes: WE Latency	1	02	1	02	1	02
21	DDR SDRAM Device Attributes:	Differential Clock	20	Differential Clock	20	Differential Clock	20
22	DDR SDRAM Device Attributes: General	+/-0.2V Voltage Tolerance	00	+/-0.2V Voltage Tolerance	00	+/-0.2V Voltage Tolerance	00
23	Minimum Clock Cycle at CL=2.5	6.0ns	60	7.5ns	75	10ns	A0
24	Maximum Data Access Time (t_{AC}) from Clock at CL=2.5	0.7ns	70	0.70ns	70	0.75ns	75
25	Minimum Clock Cycle Time at CL=2	7.5ns	75	N/A	00	N/A	00
26	Maximum Data Access Time (t_{AC}) from Clock at CL=2	7.5ns	75	N/A	00	N/A	00
27	Minimum Row Precharge Time (t_{RP})	15ns	3C	18ns	48	20ns	50
28	Minimum Row Active to Row Active delay (t_{RRD})	10ns	28	12ns	30	15ns	3C
29	Minimum RAS to CAS delay (t_{RCD})	15ns	3C	18ns	48	20ns	50
30	Minimum RAS Pulse Width (t_{RAS})	40ns	28	42ns	2A	45ns	2D
31	Module Bank Density	256MB	40	256MB	40	256MB	40
32	Address and Command Setup Time Before Clock	0.6ns	60	0.75ns	75	0.9ns	90
33	Address and Command Hold Time After Clock	0.6ns	60	0.75ns	75	0.9ns	90
34	Data Input Setup Time Before Clock	0.4ns	40	0.45ns	45	0.5ns	50
35	Data Input Hold Time After Clock	0.4ns	40	0.45ns	45	0.5ns	50
36-40	Reserved	Undefined	00	Undefined	00	Undefined	00
41	Minimum Active/Auto-Refresh Time (tRC)	55ns	37	60ns	3C	65ns	41
42	SDRAM Device Minimum Auto-Refresh to Active/Auto Refresh Command Period (tRFC)	70ns	46	72ns	48	75ns	4B
43	SDRAM Device Maximum Cycle Time (tCK max)	8	20	12	30	12	30
44	SDRAM Device Maximum DQS-DQ Skew Time (tDQSQ)	0.4	28	0.4	28	0.5	32
45	SDRAM Device Maximum Read Data Hold Skew Factor (tQHS)	0.5	50	0.55	55	0.75	75
46	Superset Information (may be used in future)	Undefined	00	Undefined	00	Undefined	00
47	SDRAM device Attributes – DDR SDRAM DIMM Height	31.75mm	01	31.75mm	01	31.75mm	01
48-61	Superset Information (may be used in future)	Undefined	00	Undefined	00	Undefined	00
62	SPD Revision	1.0	10	1.0	10	1.0	10
63	Checksum Data		9F		4C		33
64-71	Manufacturer's JEDED ID Code	0B Hex bank 3	7F7F7F0B000 00000	0B Hex bank 3	7F7F7F0B000 00000	0B Hex bank 3	7F7F7F0B000 00000
72	Module Manufacturing Location		Note1		Note1		Note1
73-25 5	Reserved	Undefined	Note 2	Undefined	Note 2	Undefined	Note 2

3. please refer to BNDCJ-0082
4. byte 73-255 please refer to NDCJ-0969

© NANYA TECHNOLOGY CORPORATION
NANYA reserves the right to change products and specifications without notice.

SPD Values for M2U12864DSH4B3G

Byte	Description	DDR400 -5T		DDR333 -6K		DDR266 -75B	
		SPD Value	hexadecimal	SPD Value	hexadecimal	SPD Value	hexadecimal
0	Number of Serial PD Bytes Written during Production	128	80	128	80	128	80
1	Total Number of Bytes in Serial PD device	256	08	256	08	256	08
2	Fundamental Memory Type	DDR SDRAM	07	DDR SDRAM	07	DDR SDRAM	07
3	Number of Row Addresses on Assembly	13	0D	13	0D	13	0D
4	Number of Column Addresses on Assembly	9	09	9	09	9	09
5	Number of DIMM Bank	1	01	1	01	1	01
6.	Data Width of Assembly	X64	40	X64	40	X64	40
7	Data Width of Assembly (cont')	X64	00	X64	00	X64	00
8	Voltage Interface Level of this Assembly	SSTL 2.5V	04	SSTL 2.5V	04	SSTL 2.5V	04
9	DDR SDRAM Device Cycle Time at CL=3	5ns	50	6ns	60	75ns	75
10	DDR SDRAM Device Access Time from Clock at CL=3	0.6ns	60	0.7ns	70	0.75ns	75
11	DIMM Configuration Type	Non-Parity	00	Non-Parity	00	Non-Parity	00
12	Refresh Rate/Type	SR/1x(7.8us),	82	SR/1x(7.8us),	82	SR/1x(7.8us), Self Refresh Flag	82
13	Primary DDR SDRAM Width	X16	10	X16	10	X16	10
14	Error Checking DDR SDRAM Device Width	N/A	00	N/A	00	N/A	00
15	DDR SDRAM Device Attr: Min Clk Delay, Random Col Access	1 Clock	01	1 Clock	01	1 Clock	01
16	DDR SDRAM Device Attributes: Burst Length Supported	2,4,8	0E	2,4,8	0E	2,4,8	0E
17	DDR SDRAM Device Attributes: Number of Device Banks	4	04	4	04	4	04
18	DDR SDRAM Device Attributes: CAS Latencies Supported	2/2.5/3	1C	2/2.5	0C	2/2.5	0C
19	DDR SDRAM Device Attributes: CS Latency	0	01	0	01	0	01
20	DDR SDRAM Device Attributes: WE Latency	1	02	1	02	1	02
21	DDR SDRAM Device Attributes:	Differential Clock	20	Differential Clock	20	Differential Clock	20
22	DDR SDRAM Device Attributes: General	+/-0.2V Voltage	00	+/-0.2V Voltage	00	+/-0.2V Voltage Tolerance	00
23	Minimum Clock Cycle at CL=2.5	6.0ns	60	7.5ns	75	10ns	A0
24	Maximum Data Access Time (t_{AC}) from Clock at CL=2.5	0.7ns	70	0.70ns	70	0.75ns	75
25	Minimum Clock Cycle Time at CL=2	7.5ns	75	N/A	00	N/A	00
26	Maximum Data Access Time (t_{AC}) from Clock at CL=2	7.5ns	75	N/A	00	N/A	00
27	Minimum Row Precharge Time (t_{RP})	15ns	3C	18ns	48	20ns	50
28	Minimum Row Active to Row Active delay (t_{RRD})	10ns	28	12ns	30	15ns	3C
29	Minimum RAS to CAS delay (t_{RCD})	15ns	3C	18ns	48	20ns	50
30	Minimum RAS Pulse Width (t_{RAS})	40ns	28	42ns	2A	45ns	2D
31	Module Bank Density	128MB	20	128MB	20	128MB	20
32	Address and Command Setup Time Before Clock	0.6ns	60	0.75ns	75	0.9ns	90
33	Address and Command Hold Time After Clock	0.6ns	60	0.75ns	75	0.9ns	90
34	Data Input Setup Time Before Clock	0.4ns	40	0.45ns	45	0.5ns	50
35	Data Input Hold Time After Clock	0.4ns	40	0.45ns	45	0.5ns	50
36-40	Reserved	Undefined	00	Undefined	00	Undefined	00
41	Minimum Active/Auto-Refresh Time (tRC)	55ns	37	60ns	3C	65ns	41
42	SDRAM Device Minimum Auto-Refresh to Active/Auto Refresh Command Period (tRFC)	70ns	46	72ns	48	75ns	4B
43	SDRAM Device Maximum Cycle Time (tCK max)	8	20	12	30	12	30
44	SDRAM Device Maximum DQS-DQ Skew Time (tDQSQ)	0.4	28	0.4	28	0.5	32
45	SDRAM Device Maximum Read Data Hold Skew Factor (tQHS)	0.5	50	0.55	55	0.75	75
46	Superset Information (may be used in future)	Undefined	00	Undefined	00	Undefined	00
47	SDRAM device Attributes – DDR SDRAM DIMM Height	31.75mm	01	31.75mm	01	31.75mm	01
48-61	Superset Information (may be used in future)	Undefined	00	Undefined	00	Undefined	00
62	SPD Revision	1.0	10	1.0	10	1.0	10
63	Checksum Data		86		33		1A
64-71	Manufacturer's JEDED ID Code	0B Hex bank 3	7F7F7F0B000 00000	0B Hex bank 3	7F7F7F0B000 00000	0B Hex bank 3	7F7F7F0B000 00000
72	Module Manufacturing Location		Note1		Note1		Note1
73-255	Reserved	Undefined	Note 2	Undefined	Note 2	Undefined	Note 2

5. please refer to BNDCJ-0082
6. byte 73-255 please refer to NDCJ-0969

© NANYA TECHNOLOGY CORPORATION
NANYA reserves the right to change products and specifications without notice.

Absolute Maximum Ratings

Symbol	Parameter	Rating	Units
V_{IN}, V_{OUT}	Voltage on I/O pins relative to V_{SS}	-0.5 to V_{DDQ} +0.5	V
V_{IN}	Voltage on Input relative to V_{SS}	-0.5 to +3.6	V
V_{DD}	Voltage on V_{DD} supply relative to V_{SS}	-0.5 to +3.6	V
V_{DDQ}	Voltage on V_{DDQ} supply relative to V_{SS}	-0.5 to +3.6	V
T_A	Operating Temperature (Ambient)	0 to +70	°C
T_{STG}	Storage Temperature (Plastic)	-55 to +150	°C
P_D	Power Dissipation (per device component)	1	W
I_{OUT}	Short Circuit Output Current	50	mA

Note: Stresses greater than those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. This is stress rating only, and functional operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect reliability.

DC Electrical Characteristics and Operating Conditions

T_A= 0°C ~ 70°C; V_{DDQ}= V_{DD}= 2.5V±0.2V(PC2100,PC2700); T_A= 0°C ~ 70°C; V_{DDQ}= V_{DD}= 2.6V±0.1V(PC3200)

Symbol	Parameter		Min	Max	Units	Notes
V_{DD}	Supply Voltage	PC2100, PC2700	2.3	2.7	V	1
		PC3200	2.5			
V_{DDQ}	I/O Supply Voltage	PC2100, PC2700	2.3	2.7	V	1
		PC3200	2.5			
V_{SS}, V_{SSQ}	Supply Voltage, I/O Supply Voltage		0	0	V	
V_{REF}	I/O Reference Voltage		0.49 x V_{DDQ}	0.51 x V_{DDQ}	V	1, 2
V_{TT}	I/O Termination Voltage (System)		V_{REF} – 0.04	V_{REF} + 0.04	V	1, 3
$V_{IH\ (DC)}$	Input High (Logic1) Voltage		V_{REF} + 0.15	V_{DDQ} + 0.3	V	1
$V_{IL\ (DC)}$	Input Low (Logic0) Voltage		-0.3	V_{REF} - 0.15	V	1
$V_{IN\ (DC)}$	Input Voltage Level, CK and $\overline{CK}$ Inputs		-0.3	V_{DDQ} + 0.3	V	1
$V_{ID\ (DC)}$	Input Differential Voltage, CK and $\overline{CK}$ Inputs		0.30	V_{DDQ} + 0.6	V	1, 4
I_I	Input Leakage Current Any input 0V ≤ VIN ≤ V_{DD}; All other pins not under test = 0V		-10	10	µA	1
I_{OZ}	Output Leakage Current DQs are disabled; 0V ≤ Vout ≤ V_{DDQ}		-10	10	µA	1
I_{OH}	Output High Current (V_{OUT} = V_{DDQ} -0.373V, min V_{REF}, min V_{TT})		-16.8	-	mA	1
I_{OL}	Output Low Current (V_{OUT} = 0.373, max V_{REF}, max V_{TT})		16.8	-	mA	1

1. Inputs are not recognized as valid until V_{REF} stabilizes.
2. V_{REF} is expected to be equal to 0.5 V_{DDQ} of the transmitting device, and to track variations in the DC level of the same. Peak-to-peak noise on V_{REF} may not exceed 2% of the DC value.
3. V_{TT} is not applied directly to the DIMM. V_{TT} is a system supply for signal termination resistors, is expected to be set equal to V_{REF}, and must track variations in the DC level of V_{REF}.
4. V_{ID} is the magnitude of the difference between the input level on CK and the input level on $\overline{CK}$.

© NANYA TECHNOLOGY CORPORATION
NANYA reserves the right to change products and specifications without notice.

AC Characteristics

Notes 1-5 apply to the following Tables; Electrical Characteristics and DC Operating Conditions, AC Operating Conditions, Operating, Standby, and Refresh Currents, and Electrical Characteristics and AC Timing.)

1. All voltages referenced to V_{SS}.
2. Tests for AC timing, IDD, and electrical, AC and DC characteristics, may be conducted at nominal reference/supply voltage levels, but the related specifications and device operation are guaranteed for the full voltage range specified.
3. Outputs measured with equivalent load. Refer to the AC Output Load Circuit below.
4. AC timing and IDD tests may use a V_{IL} to V_{IH} swing of up to 1.5V in the test environment, but input timing is still referenced to V_{REF} (or to the crossing point for CK, $\overline{CK}$), and parameter specifications are guaranteed for the specified AC input levels under normal use conditions. The minimum slew rate for the input signals is 1V/ns in the range between $V_{IL\,(AC)}$ and $V_{IH\,(AC)}$ unless otherwise specified.
5. The AC and DC input level specifications are as defined in the SSTL_2 Standard (i.e. the receiver effectively switches as a result of the signal crossing the AC input level, and remains in that state as long as the signal does not ring back above (below) the DC input LOW (HIGH) level.

AC Output Load Circuits

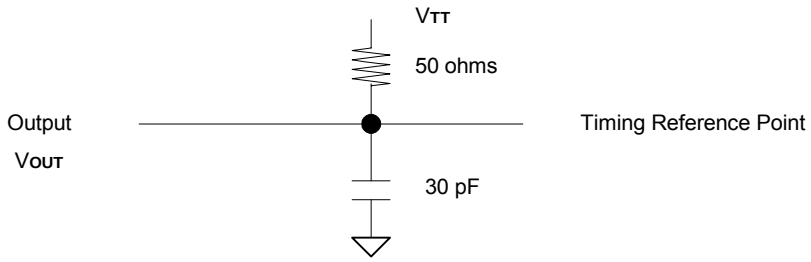

AC Operating Conditions

T_A = 0 °C ~ 70 °C; V_{DDQ}= V_{DD}= 2.5V ± 0.2V (PC2100/PC2700); V_{DDQ}= V_{DD}= 2.6V ± 0.1V (PC3200)

Symbol	Parameter/Condition	Min	Max	Unit	Notes
$V_{IH\,(AC)}$	Input High (Logic 1) Voltage.	V_{REF} + 0.31		V	1, 2
$V_{IL\,(AC)}$	Input Low (Logic 0) Voltage.		V_{REF} - 0.31	V	1, 2
$V_{ID\,(AC)}$	Input Differential Voltage, CK and $\overline{CK}$ Inputs	0.62	V_{DDQ} + 0.6	V	1, 2, 3
$V_{IX\,(AC)}$	Input Differential Pair Cross Point Voltage, CK and $\overline{CK}$ Inputs	(0.5* V_{DDQ}) - 0.2	(0.5* V_{DDQ}) + 0.2	V	1, 2, 4

1. Input slew rate = 1V/ ns.
2. Inputs are not recognized as valid until V_{REF} stabilizes.
3. V_{ID} is the magnitude of the difference between the input level on CK and the input level on $\overline{CK}$.
4. The value of V_{IX} is expected to equal 0.5*V_{DDQ} of the transmitting device and must track variations in the DC level of the same.

© NANYA TECHNOLOGY CORPORATION
NANYA reserves the right to change products and specifications without notice.

Operating, Standby, and Refresh Currents

T_A = 0 °C ~ 70 °C; V_{DDQ}= V_{DD}= 2.5V ± 0.2V (PC2100/PC2700); V_{DDQ}= V_{DD}= 2.6V ± 0.1V (PC3200)

Symbol	Parameter/Condition	Notes
IDD0	Operating Current: one bank; active/precharge; t_{RC} = $t_{RC\ (MIN)}$; t_{CK} = $t_{CK\ (MIN)}$; DQ, DM, and DQS inputs changing twice per clock cycle; address and control inputs changing once per clock cycle	1,2
IDD1	Operating Current: one bank; active/read/precharge; Burst = 2; t_{RC} = $t_{RC\ (MIN)}$; CL=2.5; t_{CK} = $t_{CK\ (MIN)}$; I_{OUT} = 0mA; address and control inputs changing once per clock cycle	1,2
IDD2P	Precharge Power-Down Standby Current: all banks idle; power-down mode; CKE ≤ $V_{IL\ (MAX)}$; t_{CK} = $t_{CK\ (MIN)}$	1,2
IDD2N	Idle Standby Current: CS ≥ $V_{IH\ (MIN)}$; all banks idle; CKE ≥ $V_{IH\ (MIN)}$; t_{CK} = $t_{CK\ (MIN)}$; address and control inputs changing once per clock cycle	1,2
IDD3P	Active Power-Down Standby Current: one bank active; power-down mode; CKE ≤ $V_{IL\ (MAX)}$; t_{CK} = $t_{CK\ (MIN)}$	1,2
IDD3N	Active Standby Current: one bank; active/precharge; CS ≥ $V_{IH\ (MIN)}$; CKE ≥ $V_{IH\ (MIN)}$; t_{RC} = $t_{RAS\ (MAX)}$; t_{CK} = $t_{CK\ (MIN)}$; DQ, DM, and DQS inputs changing twice per clock cycle; address and control inputs changing once per clock cycle	1,2
IDD4R	Operating Current: one bank; Burst = 2; reads; continuous burst; address and control inputs changing once per clock cycle; DQ and DQS outputs changing twice per clock cycle; CL = 2.5; t_{CK} = $t_{CK\ (MIN)}$; I_{OUT} = 0mA	1,2
IDD4W	Operating Current: one bank; Burst = 2; writes; continuous burst; address and control inputs changing once per clock cycle; DQ and DQS inputs changing twice per clock cycle; CL=2.5; t_{CK} = $t_{CK\ (MIN)}$	1,2
IDD5	Auto-Refresh Current: t_{RC} = $t_{RFC\ (MIN)}$	1,2,3
IDD6	Self-Refresh Current: CKE ≤ 0.2V	1,2
IDD7	Operating Current: four bank; four bank interleaving with BL = 4, address and control inputs randomly changing; 50% of data changing at every transfer; t_{RC} = $t_{RC\ (min)}$; I_{OUT} = 0mA.	1,2

1. IDD specifications are tested after the device is properly initialized.
2. Input slew rate = 1V/ ns.
3. Current at 7.8 µs is time averaged value of IDD5 at $t_{RFC\ (MIN)}$ and IDD2P over 7.8 µs.

All IDD current values are calculated from device level.

© NANYA TECHNOLOGY CORPORATION
NANYA reserves the right to change products and specifications without notice.

	M2U51264DS8HB3G			M2U25664DS88B3G			M2U12864DSH4B3G		
Symbol	PC3200 (5T)	PC2700 (6K)	PC2100 (75B)	PC3200 (5T)	PC2700 (6K)	PC2100 (75B)	PC3200 (5T)	PC2700 (6K)	PC2100 (75B)
IDD0	1915	1755	1585	995	915	825	460	420	380
IDD1	1995	1995	1825	1035	1035	945	480	480	440
IDD2P	340	340	340	180	180	180	80	80	80
IDD2N	765	765	680	405	405	360	180	180	160
IDD3P	357	357	306	189	189	162	84	84	72
IDD3N	1275	1275	1105	675	675	585	300	300	260
IDD4R	3275	3275	2705	1675	1675	1385	800	800	660
IDD4W	3195	3195	2625	1635	1635	1345	780	780	640
IDD5	3675	2875	2785	1875	1475	1425	900	700	680
IDD6	51	51	51	27	27	27	12	12	12
IDD7	5275	5275	4065	2675	2675	2065	1300	1300	1000

© NANYA TECHNOLOGY CORPORATION
NANYA reserves the right to change products and specifications without notice.

AC Timing Specifications for DDR SDRAM Devices Used on Module

T_A = 0 °C ~ 70 °C; V_{DDQ}= V_{DD}= 2.5V ± 0.2V (PC2100/PC2700); V_{DDQ}= V_{DD}= 2.6V ± 0.1V (PC3200) (Part 1 of 2)

Symbol	Parameter	5T PC3200		6K PC2700		75B PC2100		Unit	Notes
		Min.	Max.	Min.	Max.	Min.	Max.		
t_{AC}	DQ output access time from CK/$\overline{CK}$	-0.65	+0.65	-0.7	+0.7	-0.75	+0.75	ns	1-4
t_{DQSCK}	DQS output access time from CK/$\overline{CK}$	-0.55	+0.55	-0.7	+0.7	-0.75	+0.75	ns	1-4
t_{CH}	CK high-level width	0.45	0.55	0.45	0.55	0.45	0.55	t_{CK}	1-4
t_{CL}	CK low-level width	0.45	0.55	0.45	0.55	0.45	0.55	t_{CK}	1-4
t_{CK}	Clock cycle time CL=3	5	8	-	-	-	-		
t_{CK}	Clock cycle time CL=2.5	6	12	6	12	7.5	12	ns	1-4
t_{CK}	Clock cycle time CL=2	-	-	7.5	12	10	12	ns	1-4
t_{DH}	DQ and DM input hold time	0.4		0.45		0.5		ns	1-4, 15, 16
t_{DS}	DQ and DM input setup time	0.4		0.45		0.5		ns	1-4, 15, 16
t_{DIPW}	DQ and DM input pulse width (each input)	1.75		1.75		1.75		ns	1-4
t_{HZ}	Data-out high-impedance time from CK/$\overline{CK}$	-0.6	+0.6	-0.7	+0.7	-0.75	+0.75	ns	1-4, 5
t_{LZ}	Data-out low-impedance time from CK/$\overline{CK}$	-0.6	+0.6	-0.7	+0.7	-0.75	+0.75	ns	1-4, 5
t_{DQSQ}	DQS-DQ skew (DQS & associated DQ signals)		0.4		0.45		0.5	ns	1-4
t_{HP}	Minimum half clk period for any given cycle; defined by clk high (t_{CH}) or clk low (t_{CL}) time	t_{CH} or t_{CL}		t_{CH} or t_{CL}		t_{CH} or t_{CL}		t_{CK}	1-4
t_{QH}	Data output hold time from DQS	t_{HP} - t_{QHS}		t_{HP} - t_{QHS}		t_{HP} - t_{QHS}		t_{CK}	1-4
t_{QHS}	Data hold Skew Factor		0.5		0.55		0.75	ns	1-4
t_{DQSS}	Write command to 1st DQS latching transition	0.75	1.25	0.75	1.25	0.75	1.25	t_{CK}	1-4
t_{DQSL}, t_{DQSH}	DQS input low (high) pulse width (write cycle)	0.35		0.35		0.35		t_{CK}	1-4
t_{DSS}	DQS falling edge to CK setup time (write cycle)	0.2		0.2		0.2		t_{CK}	1-4
t_{DSH}	DQS falling edge hold time from CK (write cycle)	0.2		0.2		0.2		t_{CK}	1-4
t_{MRD}	Mode register set command cycle time	2		2		2		t_{CK}	1-4
t_{WPRES}	Write preamble setup time	0		0		0		ns	1-4, 7
t_{WPST}	Write postamble	0.40	0.60	0.40	0.60	0.40	0.60	t_{CK}	1-4, 6
t_{WPRE}	Write preamble	0.25		0.25		0.25		t_{CK}	1-4
t_{IH}	Address and control input hold time (fast slew rate)	0.6		0.75		0.9		ns	2-4, 9, 11, 12
t_{IS}	Address and control input setup time (fast slew rate)	0.6		0.75		0.9		ns	2-4, 9, 11, 12
t_{IH}	Address and control input hold time (slow slew rate)	0.7		0.8		1.0		ns	2-4, 10, 11, 12, 14

© NANYA TECHNOLOGY CORPORATION
NANYA reserves the right to change products and specifications without notice.

AC Timing Specifications for DDR SDRAM Devices Used on Module

T_A = 0 °C ~ 70 °C; V_{DDQ}= V_{DD}= 2.5V ± 0.2V (PC2100/PC2700); V_{DDQ}= V_{DD}= 2.6V ± 0.1V (PC3200) (Part 2 of 2)

Symbol	Parameter	5T PC3200		6K PC2700		75B PC2100		Unit	Notes
		Min.	Max.	Min.	Max.	Min.	Max.		
t_{IS}	Address and control input setup time (slow slew rate)	0.7		0.8		1.0		ns	2-4, 10-12, 14
t_{IPW}	Input pulse width	2.2		2.2		2.2		ns	2-4, 12
$t_{RP\ RE}$	Read preamble	0.9	1.1	0.9	1.1	0.9	1.1	t_{CK}	1-4
$t_{RP\ ST}$	Read postamble	0.40	0.60	0.40	0.60	0.40	0.60	t_{CK}	1-4
t_{RAS}	Active to Precharge command	42ns	120us	42ns	120us	45ns	120us		1-4
t_{RC}	Active to Active/Auto-refresh command period	55		60		65		ns	1-4
t_{RFC}	Auto-refresh to Active/Auto-refresh command period	70		72		75		ns	1-4
t_{RCD}	Active to Read or Write delay	15		18		20		ns	1-4
t_{RAP}	Active to Read Command with Auto-precharge	15		18		20		ns	1-4
t_{RP}	Precharge command period	15		18		20		ns	1-4
t_{RRD}	Active bank A to Active bank B command	10		12		15		ns	1-4
t_{WR}	Write recovery time	15		15		15		ns	1-4
t_{DAL}	Auto-precharge write recovery + precharge time	(t_{WR}/ t_{CK}) + (t_{RP} / t_{CK})		(t_{WR}/ t_{CK}) + (t_{RP} / t_{CK})		(t_{WR}/ t_{CK}) + (t_{RP} / t_{CK})		t_{CK}	1-4, 13
t_{WTR}	Internal write to read command delay	1		1		1		t_{CK}	1-4
t_{PDEX}	Power down exit time	5		6		7.5		ns	1-4
t_{XSNR}	Exit self-refresh to non-read command	75		75		75		ns	1-4
t_{XSRD}	Exit self-refresh to read command	200		200		200		t_{CK}	1-4
t_{REFI}	Average Periodic Refresh Interval		7.8		7.8		7.8	µs	1-4, 8

© NANYA TECHNOLOGY CORPORATION
NANYA reserves the right to change products and specifications without notice.

AC Timing Specification Notes

1. Input slew rate = 1V/ns.
2. The CK/$\overline{CK}$ input reference level (for timing reference to CK/$\overline{CK}$) is the point at which CK and $\overline{CK}$ cross: the input reference level for signals other than CK/$\overline{CK}$ is V_{REF}.
3. Inputs are not recognized as valid until V_{REF} stabilizes.
4. The Output timing reference level, as measured at the timing reference point indicated in AC Characteristics (Note 3) is V_{TT}.
5. t_{HZ} and t_{LZ} transitions occur in the same access time windows as valid data transitions. These parameters are not referred to a specific voltage level, but specify when the device is no longer driving (HZ), or begins driving (LZ).
6. The maximum limit for this parameter is not a device limit. The device operates with a greater value for this parameter, but system performance (bus turnaround) degrades accordingly.
7. The specific requirement is that DQS be valid (high, low, or some point on a valid transition) on or before this CK edge. A valid transition is defined as monotonic and meeting the input slew rate specifications of the device. When no writes were previously in progress on the bus, DQS will be transitioning from Hi-Z to logic LOW. If a previous write was in progress, DQS could be HIGH, LOW, or transitioning from high to low at this time, depending on t_{DQSS}.
8. A maximum of eight Auto refresh commands can be posted to any given DDR SDRAM device.
9. For command/address input slew rate >= 1.0 V/ns. Slew rate is measured between $V_{OH\ (AC)}$ and $V_{OL\ (AC)}$.
10. For command/address input slew rate >= 0.5 V/ns and < 1.0 V/ns. Slew rate is measured between $V_{OH\ (AC)}$ and $V_{OL\ (AC)}$.
11. CK/$\overline{CK}$ slew rates are >= 1.0 V/ns.
12. These parameters guarantee device timing, but they are not necessarily tested on each device, and they may be guaranteed by design or tester characterization.
13. For each of the terms in parentheses, if not already an integer, round to the next highest integer. t_{CK} is equal to the actual system clock cycle time. For example, for PC2100 at CL= 2.5, t_{DAL} = (15ns/7.5ns) +(20ns/7.0ns) = 2 + 3 = 5.
14. An input setup and hold time derating table is used to increase t_{IS} and t_{IH} in the case where the input slew rate is below 0.5 V/ns.

Input Slew Rate	Delta (t_{IS})	Delta (t_{IH})	Unit	Note
0.5 V/ns	0	0	ps	1, 2
0.4 V/ns	+50	0	ps	1, 2
0.3 V/ns	+100	0	ps	1, 2

1. Input slew rate is based on the lesser of the slew rates determined by either $V_{IH\ (AC)}$ to $V_{IL\ (AC)}$ or $V_{IH\ (DC)}$ to $V_{IL\ (DC)}$, similarly for rising transitions.
2. These derating parameters may be guaranteed by design or tester characterization and are not necessarily tested on each device.

15. An input setup and hold time derating table is used to increase t_{DS} and t_{DH} in the case where the I/O slew rate is below 0.5 V/ns.

Input Slew Rate	Delta (t_{DS})	Delta (t_{DH})	Unit	Note
0.5 V/ns	0	0	ps	1, 2
0.4 V/ns	+75	+75	ps	1, 2
0.3 V/ns	+150	+150	ps	1, 2

1. I/O slew rate is based on the lesser of the slew rates determined by either $V_{IH\ (AC)}$ to $V_{IL\ (AC)}$ or $V_{IH\ (DC)}$ to $V_{IL\ (DC)}$, similarly for rising transitions.
2. These derating parameters may be guaranteed by design or tester characterization and are not necessarily tested on each device.

16. An I/O Delta Rise, Fall Derating table is used to increase t_{DS} and t_{DH} in the case where DQ, DM, and DQS slew rates differ.

Delta Rise and Fall Rate	Delta (t_{DS})	Delta (t_{DH})	Unit	Note
0.0 ns/V	0	0	ps	1-4
0.25 ns/V	+50	+50	ps	1-4
0.5 ns/V	+100	+100	ps	1-4

1. Input slew rate is based on the lesser of the slew rates determined by either $V_{IH\ (AC)}$ to $V_{IL\ (AC)}$ or $V_{IH\ (DC)}$ to $V_{IL\ (DC)}$, similarly for rising transitions.
2. Input slew rate is based on the larger of AC to AC delta rise, fall rate and DC to DC delta rise, fall rate.
3. The delta rise, fall rate is calculated as: [1/(slew rate 1)] - [1/(slew rate 2)]
   For example: slew rate 1 = 0.5 V/ns; slew rate 2 = 0.4 V/ns. Delta rise, fall = (1/0.5) - (1/0.4) [ns/V] = -0.5 ns/V
   Using the table above, this would result in an increase in t_{DS} and t_{DH} of 100 ps.
4. These derating parameters may be guaranteed by design or tester characterization and are not necessarily tested on each device.

© NANYA TECHNOLOGY CORPORATION
NANYA reserves the right to change products and specifications without notice.

Package Dimensions

Non-ECC, 16 TSOP devices

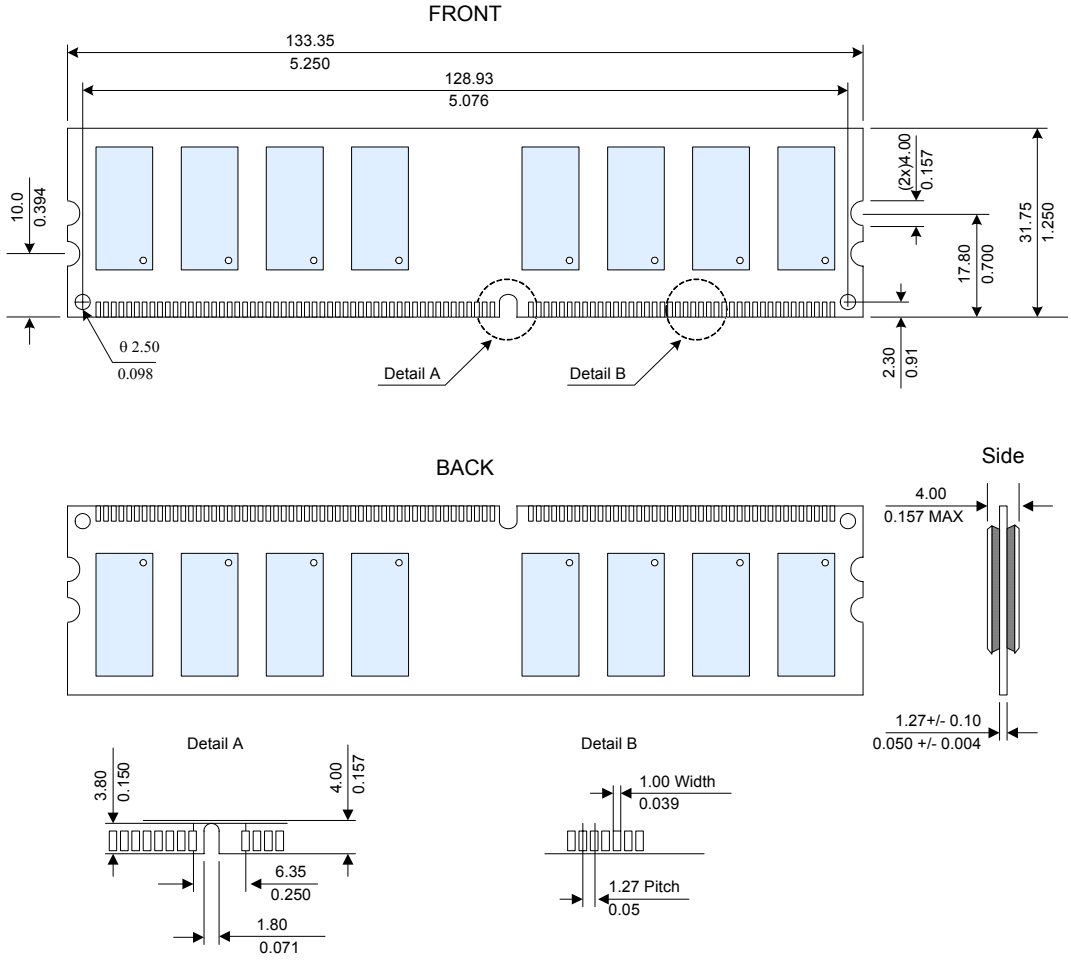

Note: All dimensions are typical with tolerances of +/- 0.15 (0.006) unless otherwise stated.

Units: Millimeters (Inches)

© NANYA TECHNOLOGY CORPORATION
NANYA reserves the right to change products and specifications without notice.

Package Dimensions

Non-ECC, 8 TSOP devices

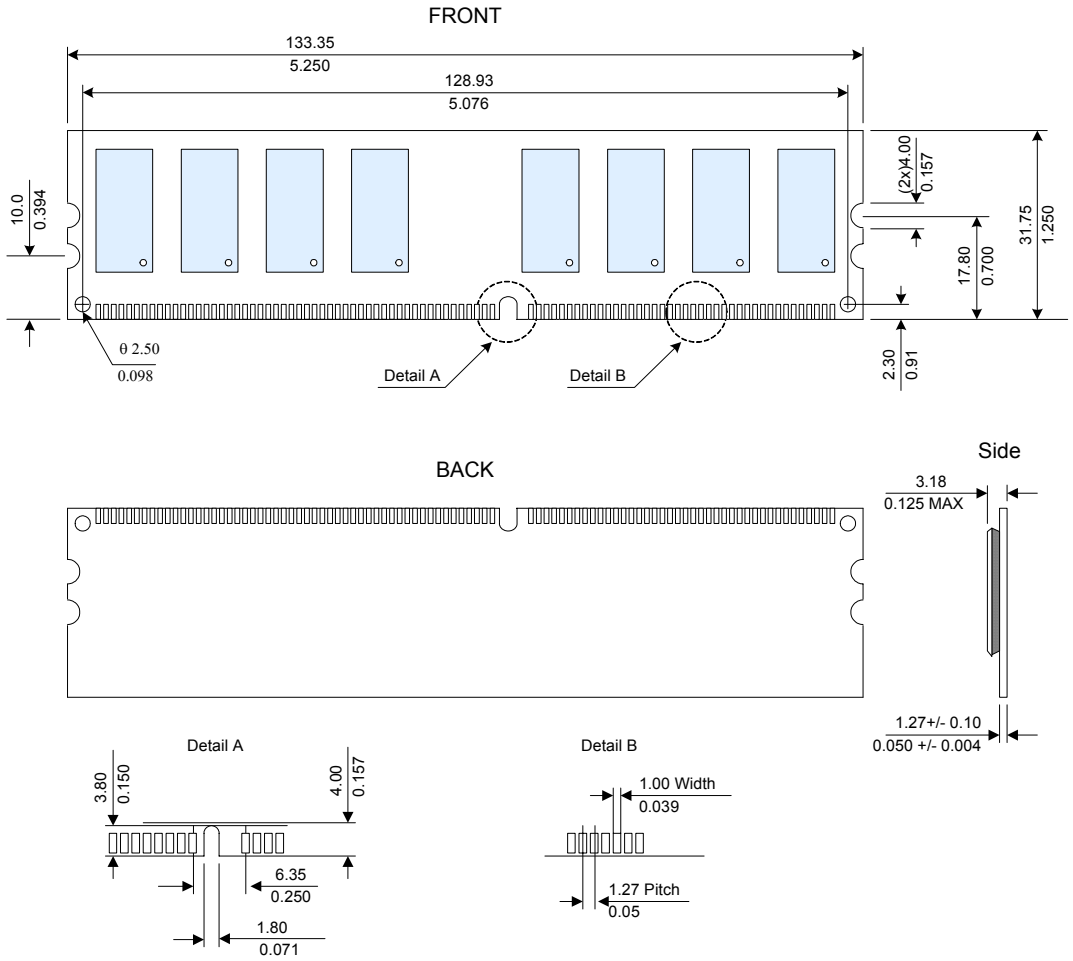

Note: All dimensions are typical with tolerances of +/- 0.15 (0.006) unless otherwise stated.

Units: Millimeters (Inches)

© NANYA TECHNOLOGY CORPORATION
NANYA reserves the right to change products and specifications without notice.

Package Dimensions

Non-ECC, 4 TSOP devices

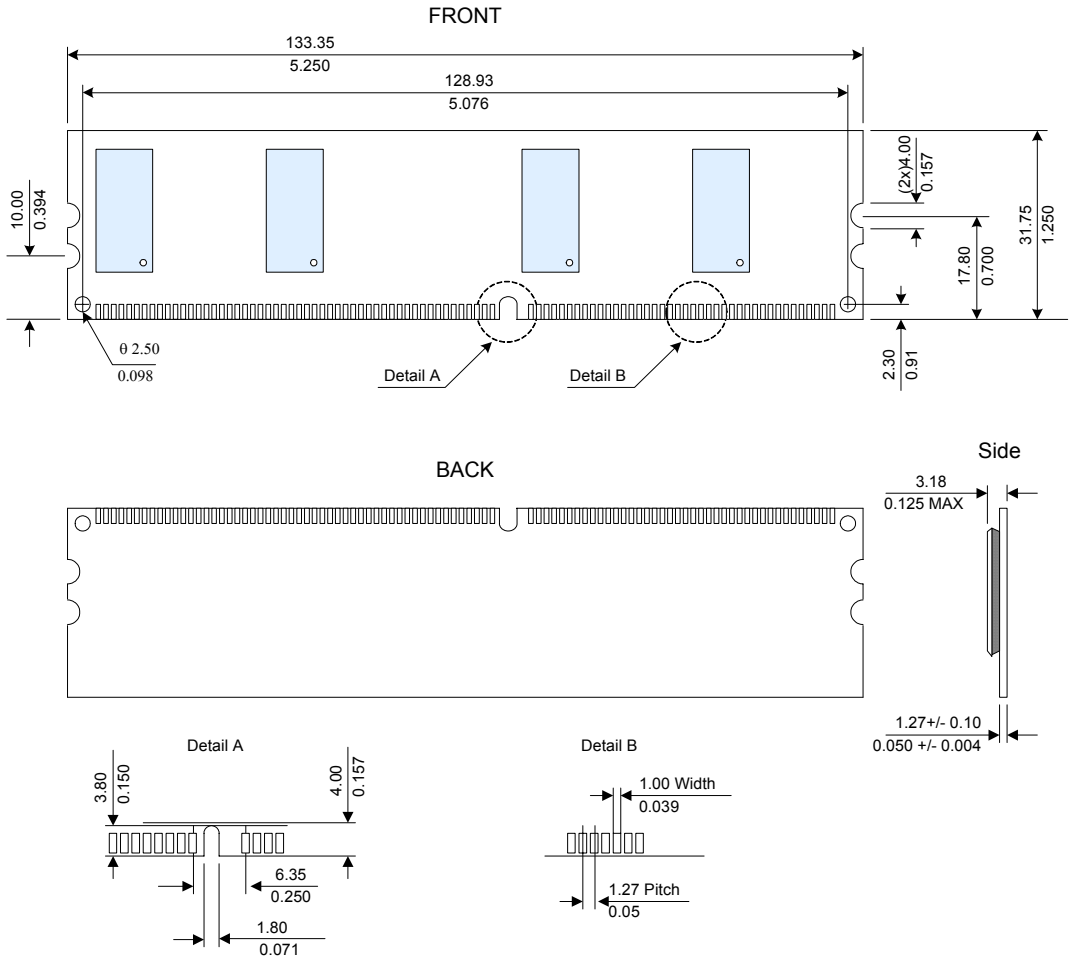

Note: All dimensions are typical with tolerances of +/- 0.15 (0.006) unless otherwise stated.

Units: Millimeters (Inches)

© NANYA TECHNOLOGY CORPORATION
NANYA reserves the right to change products and specifications without notice.

Revision Log

Rev	Date	Modification
0.1	12/2003	Updated format.
1.0	Dec 19,2003	Release
1.1	Feb 11, 2004	Correction to block diagram label. Correction to SPD bank and checksum values. Package dimension added for x8 wide devices.
2.0	Mar 4, 2004	Document reorganized by order of B die generation / size and DIMM format. DIMM: unbuffered DIMM Speed grades: 5T, 6K, 75B
2.1	May 11, 2004	Added M2U25664DS88B3G-6K speed grade to ordering information.
2.2	Aug 3, 2004	Corrected SPD contents.

Nanya Technology Corporation

Hwa Ya Technology Park 669

Fu Hsing 3rd Rd., Kueishan,

Taoyuan, 333, Taiwan, R.O.C.

Tel: +886-3-328-1688

Please visit our home page for more information: www.elixir-memory.com

Nanya reserves the right to make changes or deletions without any notice to any of its products. Nanya makes no guarantee, warranty or representation regarding the suitability of its products for any particular purpose. Nanya assumes no liability arising out of the application or use of its products. All parameters can and do vary in its application and must be validated for each customer application by the customer's technician. By purchasing Nanya products, Nanya does not convey any license under its patent rights not the rights of others. Nanya products are not designed or intended or authorized for use in systems intended for the military or surgical implants or any other applications where life is involved or where injury or death may occur or the loss/corruption of data or the loss of system reliability or mission critical applications. Should the buyer purchase or use Nanya products in such unintended or unauthorized application, the Buyer and user shall indemnify and hold Nanya and its officers, employees, subsidiaries, affiliates and distributors harmless against all claims, costs, damages, all fees and expenses directly or indirectly arising from any claim of loss, injury or death associated with unintended or unauthorized use even if such claims alleges Nanya was negligent regarding design or manufacture of the part. Nanya and the Nanya logo are trademarks of the Nanya Technology Corporation.

Printed in Taiwan

©2004